


VHM-Inox-Spiralbohrer 8xd mit IK

Solid carbide twist drills 8xd with IC

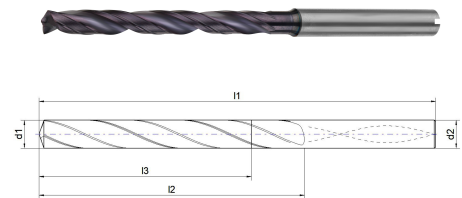

Artikelnummer Article-No.	taps	forming taps	d1 m7	l1	l2	l3	d2 h6
E.3688.1.0300	-	-	3	71	34	27	6,0
E.3688.1.0310	-	-	3.1	71	34	27	6,0
E.3688.1.0320	-	-	3.2	71	34	27	6,0
E.3688.1.0330	M 4	M 3,5 x 0,	3.3	71	34	27	6,0
E.3688.1.0340	-	-	3.4	71	34	27	6,0
E.3688.1.0350	M 4 x 0,5	-	3.5	71	34	27	6,0
E.3688.1.0360	-	-	3.6	71	34	27	6,0
E.3688.1.0370	M 4,5	M 4	3.7	71	34	27	6,0
E.3688.1.0380	-	M 4 x 0,5	3.8	86	43	35	6,0
E.3688.1.0390	-	-	3.9	86	43	35	6,0
E.3688.1.0400	M 4,5 x 0,	-	4	86	43	35	6,0
E.3688.1.0410	-	-	4.1	86	43	35	6,0
E.3688.1.0420	M 5	M 4,5	4.2	86	43	35	6,0
E.3688.1.0430	-	M 4,5 x 0,	4.3	86	43	35	6,0
E.3688.1.0440	-	-	4.4	86	43	35	6,0
E.3688.1.0450	M 5 x 0,5	-	4.5	86	43	35	6,0
E.3688.1.0460	M 5,5	-	4.6	86	43	35	6,0
E.3688.1.0470	-	M 5 x 0,75	4.7	95	57	35	6,0
E.3688.1.0490	-	-	4.9	95	57	45	6,0
E.3688.1.0500	M 6/M5,5 x	-	5	95	57	45	6,0
E.3688.1.0510	-	M 5,5	5.1	95	57	45	6,0
E.3688.1.0520	M 6 x 0,75	-	5.2	95	57	45	6,0
E.3688.1.0530	-	M 5,5 x 0,	5.3	95	57	45	6,0
E.3688.1.0540	-	-	5.4	95	57	45	6,0
E.3688.1.0550	M 6 x 0,5	-	5.5	95	57	45	6,0
E.3688.1.0560	-	M 6	5.6	95	57	45	6,0
E.3688.1.0570	-	M 6 x 0,75	5.7	95	57	45	6,0
E.3688.1.0580	-	M 6 x 0,5	5.8	95	57	45	6,0
E.3688.1.0590	-	-	5.9	95	57	45	6,0
E.3688.1.0600	M 7	-	6	95	57	45	6,0
E.3688.1.0610	-	-	6.1	114	76	52	8,0
E.3688.1.0620	M 7 x 0,75	-	6.2	114	76	52	8,0
E.3688.1.0630	-	-	6.3	114	76	52	8,0
E.3688.1.0640	-	-	6.4	114	76	52	8,0
E.3688.1.0650	-	-	6.5	114	76	52	8,0

PRODUCT DATA SHEET



Artikelnummer Article-No.	taps	forming taps	d1 m7	l1	l2	l3	d2 h6
E.3688.1.0660	-	M 7	6.6	114	76	52	8,0
E.3688.1.0670	-	M 7 x 0,75	6.7	114	76	52	8,0
E.3688.1.0680	M 8	M 7 x 0,5	6.8	114	76	52	8,0
E.3688.1.0690	-	-	6.9	114	76	52	8,0
E.3688.1.0700	M 8 x 1,0	-	7	114	76	60	8,0
E.3688.1.0710	M 8 x 0,75	-	7.1	114	76	60	8,0
E.3688.1.0720	-	-	7.2	114	76	60	8,0
E.3688.1.0730	-	-	7.3	114	76	60	8,0
E.3688.1.0740	-	M 8	7.4	114	76	60	8,0
E.3688.1.0750	M 8 x 0,5	-	7.5	114	76	60	8,0
E.3688.1.0760	-	M 8 x 1,0	7.6	114	76	60	8,0
E.3688.1.0770	-	M 8 x 0,75	7.7	114	76	60	8,0
E.3688.1.0780	M 9	M 8 x 0,5	7.8	114	76	60	8,0
E.3688.1.0790	-	-	7.9	114	76	60	8,0
E.3688.1.0800	M 9 x 1,0	-	8	114	76	60	8,0
E.3688.1.0810	-	-	8.1	142	95	68	10,0
E.3688.1.0820	M 9 x 0,75	-	8.2	142	95	68	10,0
E.3688.1.0830	-	-	8.3	142	95	68	10,0
E.3688.1.0840	-	M 9	8.4	142	95	68	10,0
E.3688.1.0850	M 10	-	8.5	142	95	68	10,0
E.3688.1.0860	-	M 9 x 1,0	8.6	142	95	68	10,0
E.3688.1.0870	-	M 9 x 0,75	8.7	142	95	68	10,0
E.3688.1.0880	M 10 x 1,2	M 9 x 0,5	8.8	142	95	68	10,0
E.3688.1.0890	-	-	8.9	142	95	68	10,0
E.3688.1.0900	M 10 x 1,0	-	9	142	95	68	10,0
E.3688.1.0910	-	-	9.1	142	95	76	10,0
E.3688.1.0920	M 10 x 0,7	-	9.2	142	95	76	10,0
E.3688.1.0930	-	M 10	9.3	142	95	76	10,0
E.3688.1.0940	-	-	9.4	142	95	76	10,0
E.3688.1.0950	M 11	-	9.5	142	95	76	10,0
E.3688.1.0960	-	M 10 x 1,0	9.6	142	95	76	10,0
E.3688.1.0970	-	M 10 x 0,7	9.7	142	95	76	10,0
E.3688.1.0980	-	M 10 x 0,5	9.8	142	95	76	10,0
E.3688.1.0990	-	-	9.9	142	95	76	10,0
E.3688.1.1000	M 11 x 1,0	-	10	142	95	76	10,0
E.3688.1.1010	-	-	10.1	162	114	90	12,0
E.3688.1.1020	M 12/M11 x	-	10.2	162	114	90	12,0
E.3688.1.1030	-	-	10.3	162	114	90	12,0
E.3688.1.1040	-	-	10.4	162	114	90	12,0
E.3688.1.1050	M 12 x 1,5	-	10.5	162	114	90	12,0
E.3688.1.1060	-	M 11 x 1,0	10.6	162	114	90	12,0
E.3688.1.1070	-	M 11 x 0,7	10.7	162	114	90	12,0
E.3688.1.1080	M 12 x 1,2	-	10.8	162	114	90	12,0
E.3688.1.1090	-	-	10.9	162	114	90	12,0
E.3688.1.1100	M 12 x 1,0	-	11	162	114	90	12,0
E.3688.1.1110	-	-	11.1	162	114	90	12,0
E.3688.1.1120	-	M 12	11.2	162	114	90	12,0
E.3688.1.1130	-	-	11.3	162	114	90	12,0
E.3688.1.1140	-	-	11.4	162	114	90	12,0
E.3688.1.1150	-	-	11.5	162	114	90	12,0
E.3688.1.1160	-	M 12 x 1,0	11.6	162	114	90	12,0

PRODUCT DATA SHEET



Artikelnummer Article-No.	taps	forming taps	d1 m7	l1	l2	l3	d2 h6
E.3688.1.1170	-	M 12 x 0,7	11.7	162	114	90	12,0
E.3688.1.1180	-	-	11.8	162	114	90	12,0
E.3688.1.1190	-	-	11.9	162	114	90	12,0
E.3688.1.1200	M 14	-	12	162	114	90	12,0
E.3688.1.1250	M 14 x 1,5	-	12.5	184	133	106	14,0
E.3688.1.1280	M 14 x 1,2	-	12.8	184	133	106	14,0
E.3688.1.1300	M 14 x 1,0	-	13	184	133	106	14,0
E.3688.1.1350	-	-	13.5	184	133	106	14,0
E.3688.1.1400	M 16/M15 x	-	14	184	133	106	14,0
E.3688.1.1450	M 16 x 1,5	-	14.5	203	152	122	16,0
E.3688.1.1500	M 16 x 1,0	-	15	203	152	122	16,0
E.3688.1.1550	M 18	-	15.5	203	152	122	16,0
E.3688.1.1600	M 18 x 2,0	-	16	203	152	122	16,0
E.3688.1.1650	-	-	16.5	222	171	150	18,0
E.3688.1.1700	-	-	17	222	171	150	18,0
E.3688.1.1750	M 20	-	17.5	222	171	150	18,0
E.3688.1.1800	-	-	18	222	171	150	18,0
E.3688.1.1850	-	-	18.5	243	190	170	20,0
E.3688.1.1900	-	-	19	243	190	170	20,0
E.3688.1.2000	M 22	-	20	243	190	170	20,0



Individuelle Schnittdaten online im
Schnittdaten-Rechner berechnen lassen:
Calculate individual cutting
data online in the cutting data calculator
www.nachreiner-schnittdaten.eu

Materialbezeichnung material description	Bearbeitung Process	Vc m/min	fz				
			Ø 0.130	Ø 0.170	Ø 0.260	Ø 0.300	Ø 0.340
PA allg. Stähle General steels	Bohrer VHM	100.00	0.130	0.170	0.260	0.300	0.340
	Bohrer VHM	90.00	0.130	0.170	0.260	0.300	0.340
	Bohrer VHM	80.00	0.130	0.170	0.260	0.300	0.340
	Bohrer VHM	70.00	0.110	0.150	0.230	0.270	0.300
	Bohrer VHM	60.00	0.090	0.125	0.190	0.230	0.260
PV Vergütungsstähle < 850N/mm² Tempering steel < 850N/mm²	Bohrer VHM	80.00	0.130	0.170	0.260	0.300	0.340
	Bohrer VHM	70.00	0.110	0.150	0.230	0.270	0.300
	Bohrer VHM	60.00	0.090	0.125	0.190	0.230	0.260
	Bohrer VHM	50.00	0.090	0.125	0.190	0.230	0.260
M Rost und säurebeständige Stähle Stainless steels	Bohrer VHM	60.00	0.085	0.120	0.150	0.180	0.230
	Bohrer VHM	50.00	0.085	0.120	0.150	0.180	0.230
K Gusseisen Cast iron	Bohrer VHM	110.00	0.160	0.220	0.280	0.340	0.420
	Bohrer VHM	100.00	0.160	0.220	0.280	0.340	0.420
	Bohrer VHM	90.00	0.160	0.220	0.280	0.340	0.420

PRODUCT DATA SHEET



Materialbezeichnung material description		Bearbeitung Process	Vc m/min	fz				
				Ø 0.130	Ø 0.170	Ø 0.260	Ø 0.300	Ø 0.340
N	AL- und AL-Legierungen AL und AL-alloys	Bohrer VHM	145.00	0.200	0.250	0.320	0.370	0.400
	AL- und AL-Legierungen AL und AL-alloys	Bohrer VHM	135.00	0.200	0.250	0.320	0.370	0.400
	AL- und AL-Legierungen >12% Si AL und AL-alloys >12% Si	Bohrer VHM	125.00	0.200	0.250	0.300	0.350	0.400
	Kupfer, Messing, Bronze, Rotguss Copper, brass, bronze, red brass	Bohrer VHM	120.00	0.200	0.220	0.280	0.320	0.370
S	Nickelbasierende Stähle Nickel based alloys	Bohrer VHM	35.00	0.080	0.100	0.160	0.200	0.220
	Titan Titanium	Bohrer VHM	30.00	0.045	0.060	0.090	0.110	0.120